

## Description

CS2-PR Process Indicator has been designed with high accuracy measurement, display and communication of DC signal 0~10V and 4(0)~20mA with square root function.


They are also build in 4 Relay outputs, 3 External Control Inputs, 1 Analog output and 1 RS-485 (Modbus RTU Mode) interface with versatile functions such as control, alarm, re-transmission and communication for a wide range of industrial applications.



## Features

- Measuring linear signal 0~10V and 0(4)~20mA(with Square Root function) in one indicator(input code: AV)
- 4 relay can be programmed individual to be a Hi / Lo / Hi Latch / Lo Latch / Go energized with Start Delay / Hysteresis / Energized & De-energized Delay functions, or to be a remote control.
- Analog output and RS-485 communication port in option
- 3 external control inputs can be programmed individual to be Relative PV (Tare) / PV Hold / Maximum or Minimum Hold / DI (remote monitoring) / Reset for Relay Energized Latch...
- CE Approved & RoHS

## Ordering Information

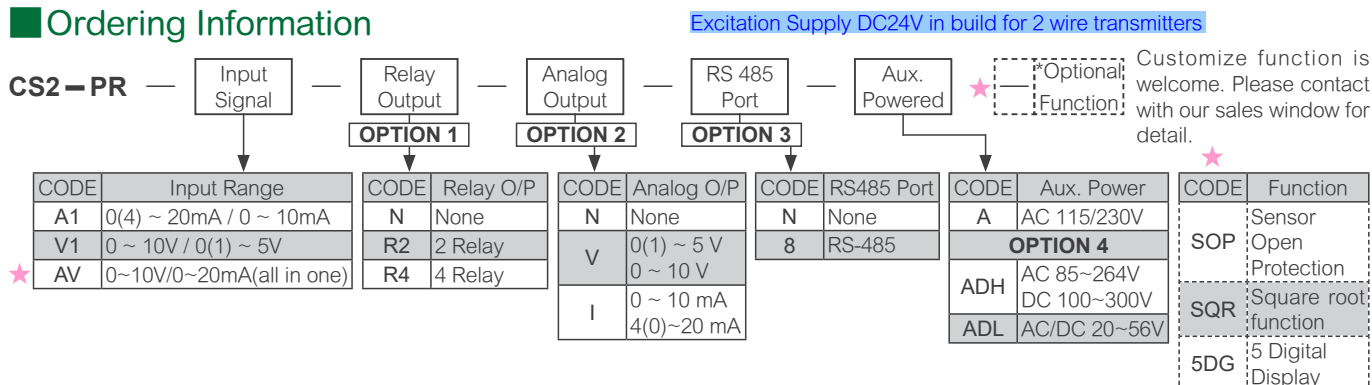

## Measurement and Wiring

| Input Range                                                                       | Input Impedance | Input Range        | Input Impedance |
|-----------------------------------------------------------------------------------|-----------------|--------------------|-----------------|
| Voltage 0 ~ 10 V                                                                  | ≥ 1M ohm        | Current 4(0)~20 mA | 250 ohm         |
| The Meter can be 0~10V and 0~20mA in one unit, according to connection #11 or #12 |                 |                    |                 |

## Technical Specification

### Input

|                |                                                                                   |
|----------------|-----------------------------------------------------------------------------------|
| Calibration:   | Digital calibration by front key                                                  |
| A/D converter: | 16 bits resolution                                                                |
| Accuracy:      | ≤± 0.04% of FS ± 1C ;                                                             |
| Sampling rate: | 15 cycles/sec                                                                     |
| Response time: | ≤100 m-sec.(when the AvG = "1") in standard                                       |
| Input type:    | 0~10V / 0~5V / 1~5V / 0-10mA / 0~20mA / 4~20mA programmable for coding AV(option) |
| Input range:   | Input High and Low programmable                                                   |
|                | R .H .: Settable range:                                                           |
|                | 0.00~100.00% of input range                                                       |
|                | R .L .: Settable range:                                                           |
|                | 0.00~100.00% of input range                                                       |

### Display & Functions

|                         |                                                           |
|-------------------------|-----------------------------------------------------------|
| LED:                    | Numeric: 5 digits, 0.8" (20.0mm)H red high-brightness LED |
|                         | Relay output indication: 4 square red LED                 |
|                         | RS 485 communication: 1 square orange LED                 |
|                         | E.C.I. function indication: 3 square green LED            |
|                         | Max/Mini Hold indication: 2 square orange LED             |
| Display range:          | -19999~29999; 5 Digital Display : -19999~99999            |
|                         | L o .5 C : Low Scale; Settable range: -19999~+29999/99999 |
|                         | H .5 C : High Scale; Settable range: -19999~+29999/99999  |
| Decimal point:          | Programmable from 0 / 0.0 / 0.00 / 0.000 / 0.0000         |
| Square root function:   | Selectable for differential pressure transducers          |
| Over range indication:  | o u F L : when input is over 20% of input range Hi        |
| Under range indication: | - o u F L : when input is under -20% of input range Lo    |
| Max / Mini recording:   | Maximum and Minimum value storage during power on.        |
| Display functions:      | PV / Max(Mini) Hold / RS 485 Programmable                 |
| Front key functions:    | Up and down key can be set to be a function as ECI.       |
| Low cut:                | Settable range: -19999~29999 counts                       |

Digital fine adjust: P<sub>u.P<sub>ro</sub></sub>: Settable range: -19999~+29999/99999  
P<sub>u.SP<sub>n</sub></sub>: Settable range: -19999~+29999/99999

#### Reading Stable Function

Average: Settable range: 1~99 times  
Moving average: Settable range: 1(None)~10 times  
Digital filter: Settable range: 0(None)/1~99 times

#### Control Functions(Optional)

Set-points: Four set-points  
Control relay: Four relays  
Relay 2 & Relay 3:  
Dual FORM-C, 5A/230Vac, 10A/115V  
Relay 1 & Relay 4:  
Dual FORM-A, 1A/230Vac, 3A/115V  
Relay energized mode: Energized levels compare with set-points:  
Hi / Lo / Go.12 / Go.23 / Hi.HLd / Lo.HLd;  
programmable  
DO function: Energized by RS485 command of master.  
Energizing functions: Start delay / Energized & De-energized delay / Hysteresis / Energized Latch  
Start band(Minimum level for Energizing):  
0~9999counts  
Start delay time: 0:00.0~9(M):59.9(S)  
Energized delay time: 0.00.0~9(M):59.9(S)  
De-energized delay time: 0.00.0~9(M):59.9(S)  
Hysteresis: 0~5000 counts

#### External Control Inputs(ECI)

Input mode: 3 ECI points, Contact or open collect input, Level trigger  
Functions: Relative PV (Tare) / PV Hold / Reset for Max or Mini. Hold / DI / Reset for Relay Energized latch  
Debouncing time: Settable range 5 ~255 x (8m seconds)

#### Analog Output(Optional)

Accuracy:  $\leq \pm 0.1\%$  of F.S.; 16 bits DA converter  
Ripple:  $\leq \pm 0.1\%$  of F.S.  
Response time:  $\leq 100$  m-sec. (10~90% of input)  
Isolation: AC 2.0 KV between input and output  
Output range: Specify either Voltage or Current output in ordering  
Voltage: 0~5V / 0~10V / 1~5V programmable  
Current: 0~10mA / 0~20mA / 4~20mA programmable  
Output capability: Voltage: 0~10V:  $\geq 1000\Omega$ ;  
Current: 4(0)~20mA:  $\leq 600\Omega$  max  
Functions: R<sub>o.H5</sub> (output range high):  
Settable range: -19999~29999/99999  
R<sub>o.L5</sub> (output range Low):  
Settable range: -19999~29999/99999  
R<sub>o.HL</sub> (output High Limit):  
0.00~110.00% of output High  
Digital fine adjust: R<sub>o.P<sub>ro</sub></sub>: Settable range: -38011~+27524  
R<sub>o.SP<sub>n</sub></sub>: Settable range: -38011~+27524

#### RS 485 Communication(Optional)

Protocol: Modbus RTU mode  
Baud rate: 4800/9600/19200/38400 programmable  
Data bits: 8 bits  
Parity: Even, odd or none (with 1 or 2 stop bit) programmable  
Address: 1 ~ 255 programmable  
Remote display: to show the value from RS485 command of master  
Distance: 1200M  
Terminate resistor: 150 $\Omega$  at last unit.

#### Electrical Safety

Dielectric strength: AC 2.0 KV for 1 min, Between Power / Input / Output / Case  
Insulation resistance:  $\geq 100$ M ohm at 500Vdc, Between Power / Input / Output  
Isolation: Between Power / Input / Relay / Analog / RS485 / E.C.I.  
EMC: EN 55011:2002; EN 61326:2003  
Safety(LVD): EN 61010-1:2001

#### Environmental

Operating temp.: 0~60 °C  
Operating humidity: 20~95 %RH, Non-condensing  
Temp. coefficient:  $\leq 100$  PPM/°C  
Storage temp.: -10~70 °C  
Enclosure: Front panel: IEC 529 (IP52); Housing: IP20


#### Mechanical

Dimensions: 96mm(W) x 48mm(H) x 120mm(D)  
Panel cutout: 92mm(W) x 44mm(H)  
Case material: ABS fire-resistance (UL 94V-0)  
Mounting: Panel flush mounting  
Terminal block: Plastic NYLON 66 (UL 94V-0)  
10A 300Vac, M2.6, 1.3~2.0mm<sup>2</sup>(16~22AWG)  
Weight: 550g / 350g(Aux. Power Code: ADH or ADL)


#### Power

Power supply: AC115/230V,50/60Hz;  
Optional: AC 85~264V / DC 100~300V, AC/DC 20~56V  
Excitation supply: DC24V/30mA maximum in standard  
Power consumption: 5.0VA maximum  
Back up memory: By EEPROM

### Front Panel

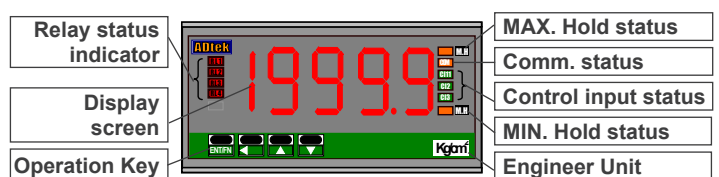


## Dimension

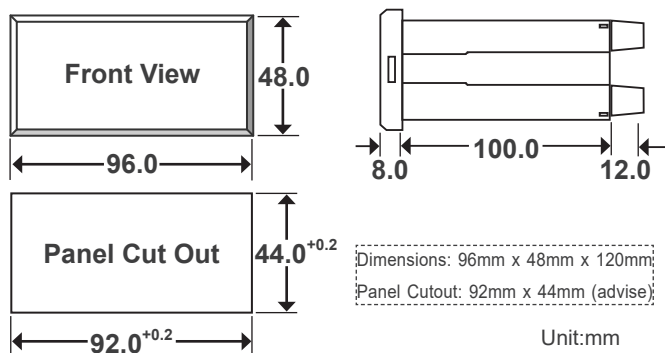


## Installation

The meter should be installed in a location that does not exceed the maximum operating temperature and provides good air circulation.

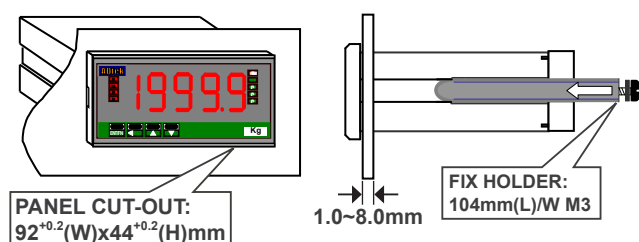


## Pin Assignment

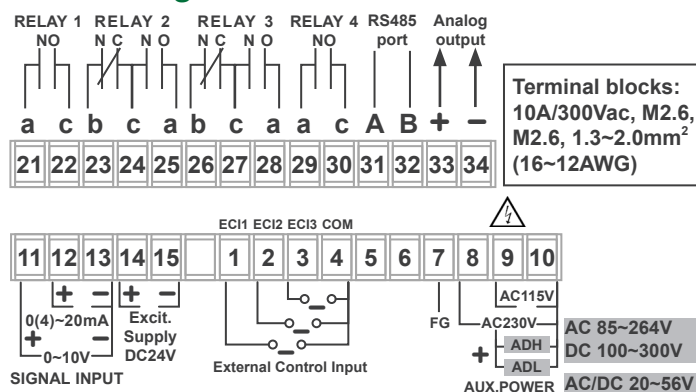


Please check the voltage of power supplied first, and then connect to the specified terminals. It is recommended that power supplied to the meter be protected by a fuse or circuit breaker.


## Power Connection

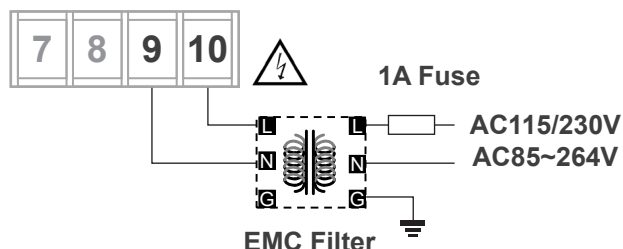


## 2 Wire Transmitter Connection

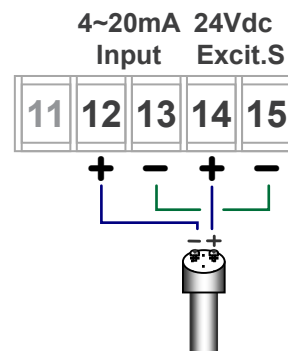


## 4(0)~20mA Input Connection




## 3 Wire Transmitter

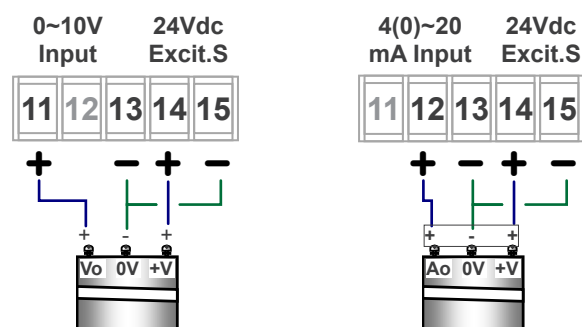

## 0~10V Source Input Connection



## RS-485 Communication Port

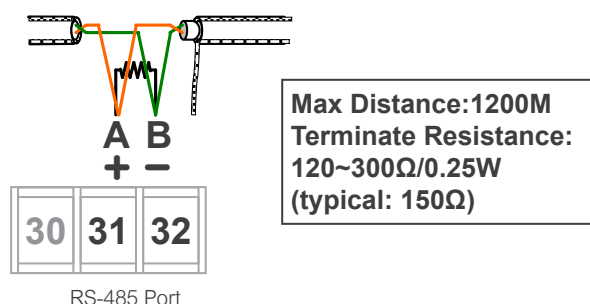

## Function Description


Input & Scaling Functions

Dual input types: (Option Code: AV)

Voltage and Current Type are in one unit available in option. If the customer specify the input coding for AV, the meter will be calibrated for 0~10V and 0~20mA in factory. The user can use in 0~10V or 4(0) ~ 20mA by difference terminals connection (#11 & #13 for 0~10V or #12 & #13 for 4(0) ~ 20mA) and programming in [R.L.P] of [Input Group].

Input range: Analog input High and Low programmable


The meter has to be specified and fixed according to ordering code (ex. 0~10V or 4(0)~20mA) in factory. If the meter has to install in difference range of input, the meter can be set in function and [R.L] or [R.H] input group to meet the input signal. For example: The meter is 0~10Vdc input, and the signal from sensor is 2~10Vdc. Please get into [Input Group] to [R.L] set (Analog input Low) to be 20.00%(10V x 20.00% = 2V), then the meter has been changed the input range to 2~10Vdc and the all relative parameters will work base on 2~10V. The meter doesn't need re-calibration after change [R.L] the and [R.H].

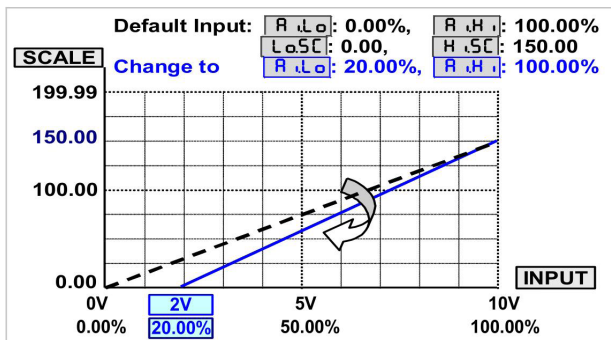

\*The setting may cause display lower resolution. Please set lower resolution when the input signal has been high compressed.

Scaling function:

Setting the [L.S.C] (Low scale) and [H.S.C] (High scale) in [Input Group] to relative input signal. Reverse scaling will be done too. Please refer to the figure as below,

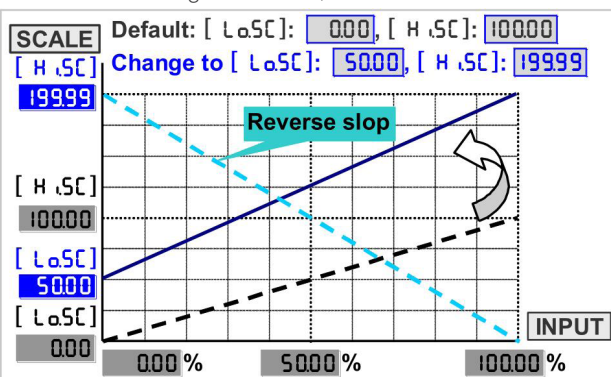

\*Too narrow scale may cause display lower resolution.

## Display & Functions

Max / Mini recording: The meter will storage the maximum and minimum value in [User Level] during power on in order to review drifting of PV.


Display functions: PV / Max(Mini) Hold / RS 485 programmable in (Please refer to step A-07) [Display] function of [Input Group]

Present Value [P.V]: The display will show the value that Relative to Input signal.

Maximum Hold [M.H] / Minimum Hold [M.L]:

The meter will keep display in maximum(minimum) value during power on, until manual reset by front key in [User level], rear terminal is close [External Control Input(ECI)] or press front down or up key to reset (according to setting, please refer to the function of the ECI Group)

► Please find the sticker that enclosure the package of the meter to stick on the right side of square orange LED

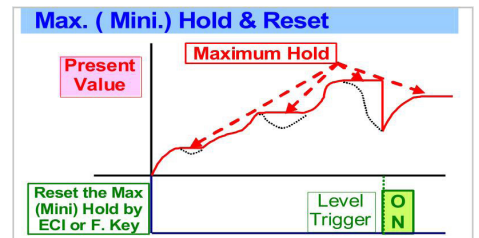

Remote Display by RS485 command [5485]:

The meter will show the value that received from RS485 sending. In past, The meter normally receive 4~20mA or 0~10V from AO or digital output from BCD module of PLC. We support a new solution that PV shows the value from RS485 command of master can so that can be save cost and wiring from PLC.

Other functions: The meter is also support relative PV (ΔPV) and PV hold functions that set in [ECI Group]. Please refer to explain of ECI functions.

Square root function: The function can be set [n] or [YES] in [Input Group] to measure the signal from differential pressure flow-meter.

The formula =  $\sqrt{(PV/HS)} \times HS$


Settable range from -19999~+99999 counts.

The users can set the value range.


1.If set the positive value (X1) here to display "0" which it expressed to be low-cut the PV between "+X1 (plus)" & "-X1(minus)" /absolute value

PV< I Setting value (X1) I, the display will be shown 0

EX: Low Cut is set for 0.50. If the display is from -0.50~+0.50, that will be 0.

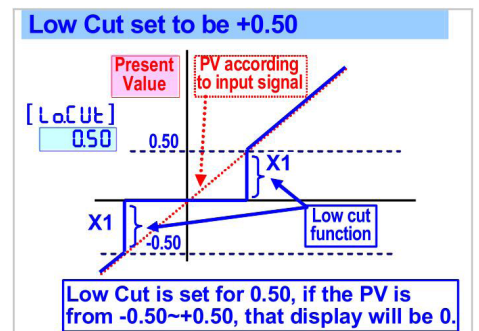

2.If set the negative value (X2) here to display "X2" which it expressed to be low-cut the PV that it's under the X2 setting value; PV< Setting value(X2), the display will be shown X2.  
EX: Low Cut is set for -0.01. If the display is < -0.01, and all the display will be -0.01.

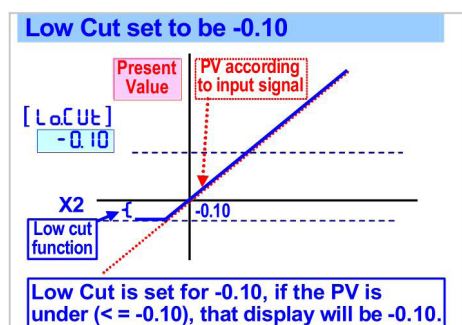


Digital fine adjust: Settable range: -19999~+29999

Users can get Fine Adjustment for Zero & Span of PV by front key of the meter, and "Just Key In" the value which user want to show in the current input signals.

Especially, the [P\_uP\_r\_o] & [P\_uS\_P\_n] are not only in zero & span of PV, but also any lower point for [P\_uP\_r\_o] & higher point for [P\_uS\_P\_n]. The meter will be linearization for full scale.

The adjustment can be clear in function [P\_S\_C\_L\_r]

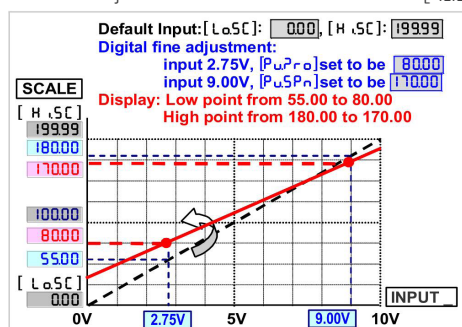

## Reading Stable Function

Average display:

Jittery Display caused by the noise or unstable signal. User can set the times to average the readings, and to get smoothly display.

The meter's sampling is 15cycle/sec. If the [Ave] (Average) set to be 3 to express the display update with 5 times/sec. The meter will calculate the sampling 1-3 and update the display value. At meantime, the sampling 4-6 will be processed to calculate.




Remark: The higher average setting will cause the response time of Relay and Analog output slower.

Moving average:

Jittery Display caused by the reasons as like as noise or unstable signal. User can set the times to average the readings, and get smoothly display.

The meter's sampling is 15cycle/sec. If the [MAve] (Moving Average) set to be 3 expressed the display update with 15 times/sec.,

In the first updated display value will be same as average function. In the next updated display value, the function will get the new fourth sample (sample 4) then throw away the first sample (sample 1) that the newest 3 samples (sample 2,3,4) will be calculated for the updated display value.

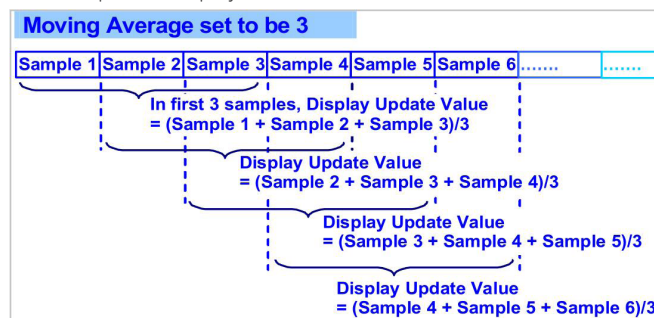

Remark:

The higher moving average setting wouldn't cause the response time of Relay and Analog output slower after first 3 samples.

Digital Filter:

The digital filter can reduce the magnetic noise in field.

The digital filter can reduce the influence of spark noise caused by magnetic of coil.


If the values of samples are over digital filter band (fix in firmware and about 5% of stable reading) 3 times (Digital Filter set to be 3) continuously, the meter will admit the samples and update the new reading. Otherwise, it will be as treat as a noise and skip the samples.

## Control Functions(Optional)

Relay energized mode: Hi / Lo / Go-1.2 / Go-2.3 / Hi.HLd / Lo.HLd / DO programmable

Hi [Hi] (Fig.1-①): Relay will energize when PV > Set-Point

Lo [Lo] (Fig.1-②): Relay will energize when PV < Set-Point

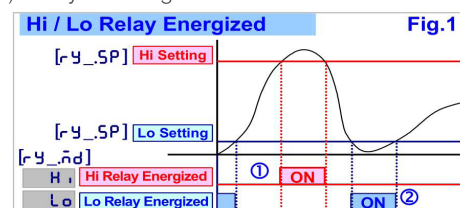

Go-1.2 [Go-1.2]:


This function is programmable in Relay 4 only. If the Relay 4 set to be Go function, the relay will compare with [Y1SP] and [Y2SP].

Go relay energized when the condition is [Y1SP] (Hi) > PV > [Y2SP] (Lo)

Go-2.3 [Go-2.3]:

This function is programmable in Relay 4 only. If the Relay 4 set to be Go function, the relay will compare with [Y2SP] and [Y3SP].


Go relay energized when the condition is [Y2SP] (Hi) > PV > [Y3SP] (Lo)

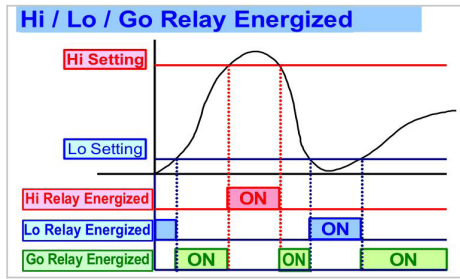

Hi.HLd **[r4HLd]** (Lo.HLd **[LoHLd]**):

The relay energized with latched function is for electrical safety and human protection. For example, a current meter relay installed for the over current of motor. Generally, over current of motor caused by over load, mechanical dead lock, aging of insulation and so on. Above cases will alarm in the meter, if the user doesn't figure out the real reason and re-start the motor. It may damage the motor. The functions of Hi.HLd & Lo.HLd are designed must be manual reset the alarm after checking out and solving the issue. It's very important idea for electrical safety and human protection.

As the PV Higher (or lower) than set-point, the relay will be energized to latch except manual reset by from key in **[u5Er LEL]** or **[EC]** (ECI) set to be **[r4SE]** is closed.

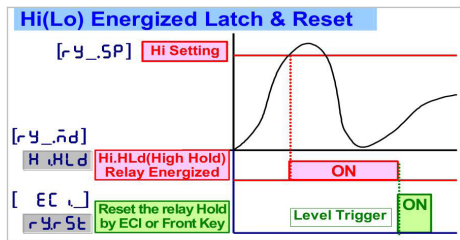

DO function **[do]**: The function has been designed not only a meter but also an I/O interface. In the case of motor control cabinet can't get the remote function. It's very easily to get the ON/OFF status of switch from CS2 series with RS485 function.

If the **[r4nd]** had been set **[do]**, the relay will be energized by RS485 command directly, but no longer to compare with set-point.

Start delay band and Start delay time:


The functions have been designed for,

- ▶ To avoid starting current of inductive motor (6 times of rated current) with alarm.
- ▶ If the **[r4nd]** relay energized mode had been set to be **[Lo]** (Lo) or **[LoHLd]** (Lo & latch). As the meter is power on and no input to display the "0" caused the relay will be energized. User can set a band and delay time to inhibit the energized of relay.

Start band **[r45b]** (Fig.2-①): Settable range from 0~9999 Counts

Start delay time **[r45d]** (Fig.2-②):

Settable range from 0.0(s)~9(m)59.9(s);

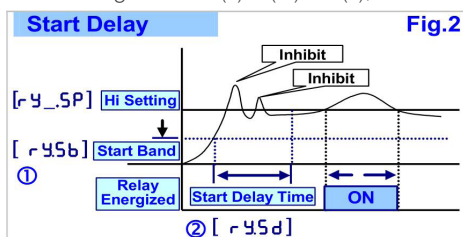

Hysteresis **[r4HY]** (Fig.3-①): Settable range from 0~9999 Counts

As the display value is swing near by the set point to cause the relay on and off frequently. The function is to avoid the relay on and off frequently such as compressor.....etc.,


Relay energized delay **[r4rd]** (Fig.3-②):

Settable range from 0.0(s)~9(m)59.9(s);

The function is to avoid the miss action caused by noise. Sometime, the display value will swing caused by spark of contactor...etc.. User can set a period to delay the relay energized.

Relay de-energized delay **[r4Fd]** (Fig.3-③):

Settable range from 0.0(s)~9(m)59.9(s);

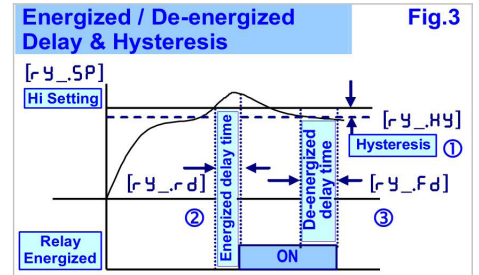

## External Control Inputs(ECI)

The three external control inputs are individually programmable to perform specific meter control or display functions. All E.C.I. have been designed in level trigger actions. Please pay attention, the ECI1 or ECI2 input will be disable while UP or Down Key has been set to be "YES".


Functions:

Relative PV / PV Hold / Reset Max or Mini. Hold / DI / Reset for Relay Energized latch programmable.

Relative PV **[RELPU]** or Tare:


The **[EC]** can be set to be **[RELPU]** function.

When the E.C.I. is closed, the reading will show the differential value.

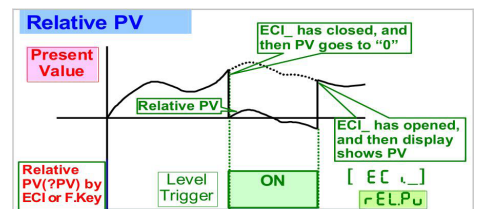

PV Hold **[PUHLd]**:


The **[EC]** can be set to be **[PUHLd]** (PV Hold) function. The display will be hold when the ECI is closed, until the ECI is to be open. Please refer to the below figures,

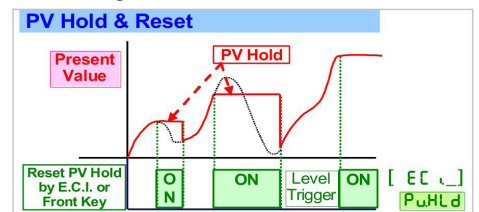

Reset for Maximum or Minimum Hold **[r4SE]**:

When the **[dSPly]** function in **[r4PUt]** selected **[r4rHd]** or **[r4nHd]**, the display will show Maximum or Minimum value.


The **[EC]** function can be set to be **[r4SE]** function. The display will be hold when the ECI is closed, until the ECI is to be open. Please refer to the below figures,

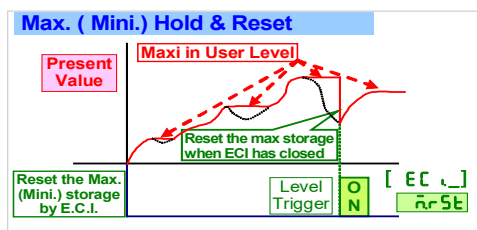

DI [d] : The E.C.I can be set to be [d] function, when the meter building in RS485 port. It is easier to get remote monitoring a switch status through the meter as like as DI of PLC.

Reset for Relay Energized Latch [YrSE] :

If the relay energized mode has been set to be [H.HLd] (Energized latch), and the [EC] can be set to be [YrSE] (Reset the Relay energized latch). When the PV meets the condition of relay energizing, the relay will be energized and latch until the ECI is to be closed.

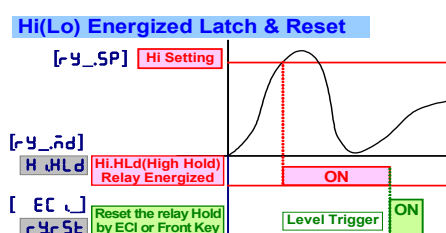

Debouncing time:

The function is for avoiding noise signal to into the meter. And The basic period is 8mseconds. It means you set the number that has to multiple 8 m-seconds. For example: [dEBnE] set to be 5, it means 5 x 8mseconds = 40mseconds

## ■ Analogue output(option)

Please specify the output type either an 0~10V or 4(0) ~ 20mA in ordering. The programmable output low and high scaling can be based on various display values. Reverse slope output is possible by reversing point positions.

Output range: Voltage: 0~5V / 0~10V / 1~5V programmable

Current: 0~10mA / 0~20mA / 4~20mA programmable


Functions: Output High / Low scale, output limit, fine adjustment

Output range high [RaH5]:

To setting the Display value High to versus output range High(as like as 20mA in 4~20)

Output range low [RaL5]:


To setting the Display value Low to versus output range Low(as like as 4mA in 4~20)

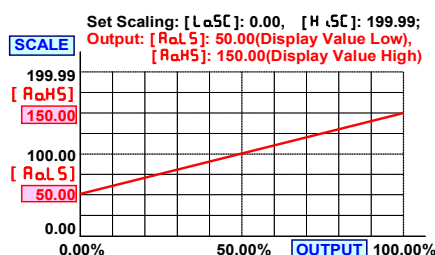

The range between [aOHs] and [aOLs] should be over 20% of span at least; otherwise, it will be got less resolution of analogue output.

Output High Limit [RaL5]:

0.00~110.00% of output High User can set the high limit of output to avoid a damage of receiver or protection system.

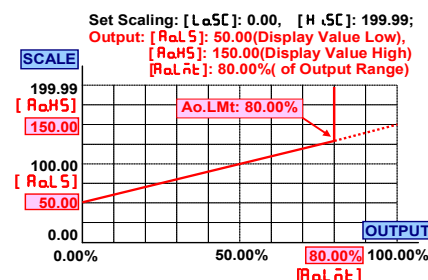

Fine zero & span adjustment:

Users can get Fine Adjustment of analogue output by front key of the meter. Please connect standard meter to the terminal of analogue output. To press the front key(up or down key) of meter to adjust and check the output.

Zero adjust [RaPr0]:Fine Zero Adjustment for Analog Output;

Settable range: -38011~27524;


Span adjust [Ra5Pn]:Fine Span Adjustment for Analog Output;

Settable range: -38011~27524;

## ■ RS485 Communication Port(Optional)

CS2 series supports Modbus RTU mode protocol to be used as Remote Terminal Unit (RTU) for monitoring and controlling in a SCADA (Supervisor Control And Data Acquisition) system. The baud rate can be up to 38400 bps. It's not only can be read the measured value and DI (external control inputs) status but also controls the relays output (DO) by RS485 communication ports.

### CS2-PR & SC2-RL APPLICATION MEASURING & RS485 COMMUNICATION

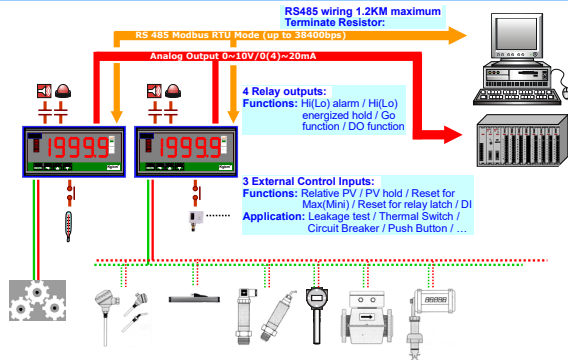


### Remote Display:

The meter will show the value that received from RS485 command. In past, The meter normally receive 4~20mA or 0~10V from AO or digital output from BCD module of PLC .We support a new solution that PV shows the value from RS485 command of master so that can be save cost and wiring from PLC.

When the [ 45PLy ] set to be RS485, it means, the PV screen will show the number from RS485 command & data. The data(number) will be same as PV that will compare with set-point, analogue output and ECI functions so that is to control analogue output, relay energized and so on.

### CS2 APPLICATION FOR REMOTE DISPLAY FROM RS485 COMMAND

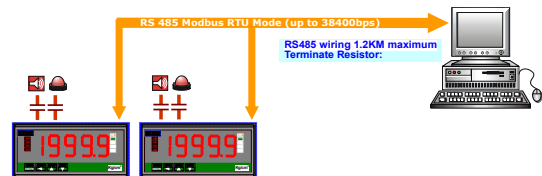

### Calibration

System calibration by front key. The process of calibration, please refer to the operating manual

### Optional Function

Customize function with quantities is welcome. Please contact with our sales for detail. The appendix code of optional function will be added behind the code of auxiliary power as like as xxx-A-HSM.


## ■ Error Message

Before Power On, Please Check The Specification And Connection Again.

Self-Diagnosis And Error Code:

| DISPLAY       | DESCRIPTION                                                              | REMARK                                         |
|---------------|--------------------------------------------------------------------------|------------------------------------------------|
| ouF L         | Display is positive-overflow<br>(Signal is over display range)           | (Please check the input signal)                |
| -ouF L        | Display is negative-overflow<br>(Signal is under display range)          | (Please check the input signal)                |
| ouF L         | ADC is positive-overflow<br>(Signal is higher than input range high 20%) | (Please check the input signal)                |
| -ouF L        | ADC is negative-overflow<br>(Signal is lower than input range low -20%)  | (Please check the input signal)                |
| EEP ⇌ FA IL   | EEPROM occurs error                                                      | (Please send back to manufactory for repaired) |
| A i.C.nG ⇌ Pu | Calibrating Input Signal do not process                                  | (Please process Calibrating Input Signal)      |
| A i.C ⇌ FA IL | Calibrating Input Signal error                                           | (Please check Calibrating Input Signal)        |
| AoC.nG ⇌ Pu   | Calibrating Output Signal do not process                                 | (Please process Calibrating Output Signal)     |
| AoC ⇌ FA IL   | Calibrating Output Signal error                                          | (Please check Calibrating Output Signal)       |

## Front Panel

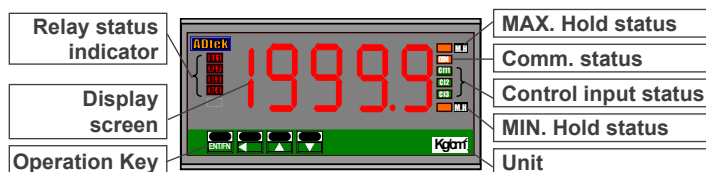

### Numeric Screens

0.8" (20.0mm) red high-brightness LED for 4 2/3 or 5 digital present value.

### I/O Status Indication

- Relay Energized: 4 square red LED
  - RL1** display when Relay 1 energized;
  - RL2** display when Relay 2 energized;
  - RL3** display when Relay 3 energized;
  - RL4** display when Relay 4 energized;
- External Control Input Energized: 3 square green LED
  - EC1** display when E.C.I. 1 close(dry contact)
  - EC2** display when E.C.I. 2 close(dry contact)
  - EC3** display when E.C.I. 3 close(dry contact)
- RS485 Communication: 1 square orange LED
  - COM** will flash when the meter is receive or send data, and **COM** flash quickly means the data transient quicker.
- Max/Mini Hold indication: 2 square orange LEDs
  - M.H** displayed: When the display function has been selected in Maximum or Minimum Hold function.

### Stickers:

Each meter has a sticker what are functions and engineer label enclosure.

- Relay energized mode: **HN** **Hi** **Lo** **LL** **DO**
- E.C.I. functions mode:
  - PV.H** PV.H(PV Hold) / **Tare** Tare / **DI** DI(Digital Input)
  - M.RS** M.RS(Maximum or Minimum Reset) /
  - R.RS** R.RS(Reset for Relay Latch)
- Engineer Label: over 80 types.

## Operating Key

4 keys for Enter(Function) / Shift(Escape) / Up key / Down key

|               | Setting Status                       | Function Index                                        |
|---------------|--------------------------------------|-------------------------------------------------------|
| Up key        | Increase number                      | Go back to previous function index                    |
| Down key      | Decrease number                      | Go to next function index                             |
| Shift key     | Shift the setting position           | Go back to this function index, and abort the setting |
| Enter/Fun key | Setting Confirmed and save to EEPROM | From the function index to get into setting status    |

Pass Code **P.CodE** : Settable range: 0000~9999;

User has to key in the right pass word so that get into 【Programming Level】. Otherwise, the meter will go back to measuring page. If user forgets the password, please contact with the service window.

### Function Lock

- None **nonE** : no lock all.
- User Level **USER** : User Level lock. User can get into User Level for checking but setting.
- Programming Level **Prog** : Programming level lock. User can get into programming level for checking but setting.
- ALL **ALL** : All lock. User can get into all level for checking but setting.

### Front Key Function


- The Key can be set to be the same function as the setting of EC1.

Ex. The EC1 set to be **PuHld** and the function **[E.t-UP]** set to be **YES** in **[EC, GROUP]**. When user presses Key, the PV will hold as like as EC1 close.

- The Key can be set to be the same function as the setting of EC2.

Ex. The EC2 set to be **RELPU** and the function **[E2-dn]** set to be **YES** in **[EC, GROUP]**. When user presses Key, the PV will show relative value as like as EC2 close.

► If the front key function has been set, the terminal input for EC1 will be disabling.



|      |                      |                                                                                                 |
|------|----------------------|-------------------------------------------------------------------------------------------------|
| A-7  | 00<br>PuPro<br>↓ ↑   | PuPro: Fine Low point<br>Adjustment for PV<br>display<br>-19999~+29999                          |
| A-8  | 00<br>PuSPn<br>↓ ↑   | PuSPn: Fine High<br>point Adjustment for<br>PV display<br>-19999~+29999                         |
| A-9  | nonE<br>PSClr<br>↓ ↑ | PSClr: Clear Fine Zero<br>/ Span Adjustment for<br>PV display<br>nonE / PuPro / PuSPn<br>/ LoHi |
| A-10 | Pu<br>dSPly<br>↓ ↑   | dSPly: Display<br>Function for PV screen<br>Pu / Hi / Lo / nonE<br>/ F5485                      |
| A-11 | 00<br>LoCut<br>↓ ↑   | LoCut: Low Cut the PV<br>-19999~+29999                                                          |
| A-12 | 5<br>AuG<br>↓ ↑      | AuG: Average update<br>for PV<br>1(None)~99times                                                |
| A-13 | 1<br>AuAuG<br>↓ ↑    | AuAuG: Moving<br>Average update for PV<br>1(None)~10times                                       |
| A-14 | 0<br>dF.Lt<br>↓ ↑    | dF.Lt: Digital filter<br>0(None)/1~99times                                                      |
| A-15 | 0000<br>PCodE<br>↓ ↑ | PCodE: Pass Code<br>setting for access to<br>Programming Level<br>0000~9999                     |
| A-16 | nonE<br>FLocL<br>↓ ↑ | FLocL: Function Level<br>Lock<br>nonE / USEr / EnG<br>/ ALL                                     |
| B-8  | 0<br>rY2HY<br>↓ ↑    | rY2HY: Relay 2<br>Hysteresis<br>0~5000counts                                                    |
| B-9  | 0000<br>rY2rd<br>↓ ↑ | rY2rd: Relay 2<br>energized delay time<br>0:00.0~9(m):59.9(s)                                   |
| B-10 | 0000<br>rY2Fd<br>↓ ↑ | rY2Fd: Relay 2<br>de-energized delay<br>time<br>0:00.0~9(m):59.9(s)                             |
| B-11 | Lo<br>rY3nd<br>↓ ↑   | rY3nd: Relay 3<br>energized mode<br>oFF / Lo / Hi<br>/ LoHLd / HiHLd / do                       |
| B-12 | 0<br>rY3HY<br>↓ ↑    | rY3HY: Relay 3<br>Hysteresis<br>0~5000counts                                                    |
| B-13 | 0000<br>rY3rd<br>↓ ↑ | rY3rd: Relay 3<br>energized delay time<br>0:00.0~9(m):59.9(s)                                   |
| B-14 | 0000<br>rY3Fd<br>↓ ↑ | rY3Fd: Relay 3<br>de-energized delay<br>time<br>0:00.0~9(m):59.9(s)                             |
| B-15 | Lo<br>rY4nd<br>↓ ↑   | rY4nd: Relay 4<br>energized mode<br>oFF / Lo / Hi<br>/ LoHLd / HiHLd / do<br>/ Go-12 / Go-23    |
| B-16 | 0<br>rY4HY<br>↓ ↑    | rY4HY: Relay 4<br>Hysteresis<br>0~5000counts                                                    |
| B-17 | 0000<br>rY4rd<br>↓ ↑ | rY4rd: Relay 4<br>energized delay time<br>0:00.0~9(m):59.9(s)                                   |
| B-18 | 0000<br>rY4Fd<br>↓ ↑ | rY4Fd: Relay 4<br>de-energized delay<br>time<br>0:00.0~9(m):59.9(s)                             |